


Technical data


Voltage	220-240 VAC 50 Hz
System effect	6W
Colour rendering	CRI>90
Glare	UGR<19
Expected lifespan	50,000 timer
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	36°
Cut out dimension	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø88 mm
Dimensions driver	L: 110 mm, W: 46 mm, H: 25 mm
Tilt angle	40°
Leakage current	<0.5mA 240 VAC
Operating temperature	-20° - 45°
Possibility of through wiring	Yes, 3G1.5 - 30 pcs.
IP rating	IP54 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, polycarbonat
Environment	Indoors
Warranty	5 years
Approvals	CE

Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index - CRI>90
- High lumen output
- Glare free
- Flicker free according to the latest Ecodesign / ErP directive
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

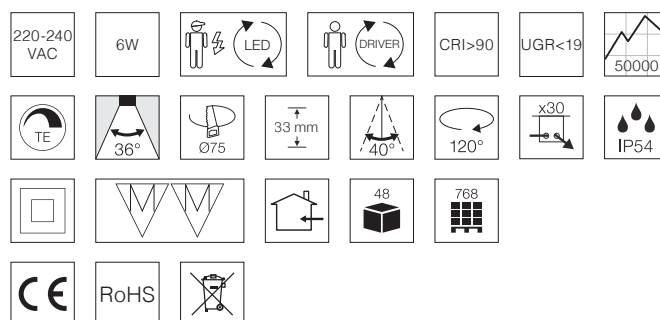

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

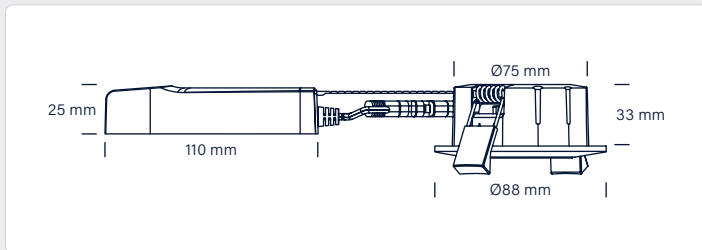

Low Profile ECO | 2700K | 450lm

Item no.	EAN no.	Design, colour	Light source
32111012	5704629001084	○ matt white (RAL 9016)	5W LED, item no 32000002
32111022	5704629001114	○ brushed alu	5W LED, item no 32000002
32111002	5704629001145	○ grey (RAL 9006)	5W LED, item no 32000002
32111092	5704629001176	○ matt black (RAL 9005)	5W LED, item no 32000002

Low Profile ECO | 3000K | 470lm

Item no.	EAN no.	Design, colour	Light source
32111013	5704629001091	○ matt white (RAL 9016)	5W LED, item no 32000002
32111023	5704629001121	○ brushed alu	5W LED, item no 32000002
32111003	5704629001152	○ grey (RAL 9006)	5W LED, item no 32000002
32111093	5704629001183	○ matt black (RAL 9005)	5W LED, item no 32000002

Low Profile ECO | 4000K | 510lm

Item no.	EAN no.	Design, colour	Light source
32111014	5704629001107	○ matt white (RAL 9016)	5W LED, item no. 32000004
32111024	5704629001138	○ brushed alu	5W LED, item no. 32000004
32111004	5704629001169	○ grey (RAL 9006)	5W LED, item no. 32000004
32111094	5704629001190	○ matt black (RAL 9005)	5W LED, item no. 32000004

Circuit breaker specification

Circuit breaker	B10	B13	B16	B20	C10	C13	C16	C20
Number of units	10	13	16	20	10	13	16	20
	40	52	63	79	40	53	65	81