


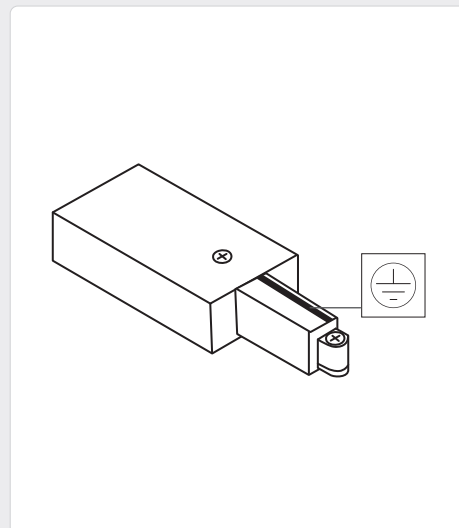


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	xW
Light source	LED F
Colour temperature	xxxx Kelvin
Light intensity	xxx Lumen
Colour rendering	CRI>xx
Glare	UGR<xx
Expected lifespan	xxxxx hours
Dimmable, how	Yes, xxxx edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	x.xx
PstLM <1	x.x
SDCM	x
Beam angle	xx°
Cut out	Øxx mm
Installation height	xx mm
Exterior dimension / dimension	Øxx mm
Dimension driver	
Dimension connector box	
Tilt angle	xx°
Possibility of through wiring - quantity	Yes/No, ? x ?G?,? mm ² - ?? pcs.
Operating temperature	-20° - +50°
Ambient temperature	-20° - +50°
Storage temperature	-20° - +70°
IP rating, front / back	IPxx / IPxx
IK rating	IKxx
Insulation class	Class III
Material	xxxx, xxx
Environment	Indoor and outdoor
Warranty, product / surface	x years / x years
Approvals	CE

Product information

- Cable relief included
- With their minimalist and stylish design, the tracks are the perfect solution for lamps – whether it is pendants or track spots
- They are compatible with many systems, both available and earlier
- They are mounted easily and quickly on the wall or ceiling using the pre-drilled screw holes
- The tracks and accessories are available in the colors Nordic White and Matt black

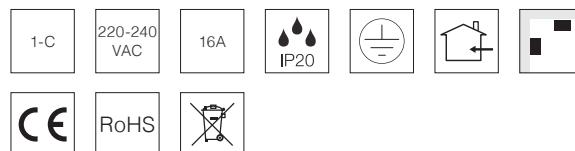

Item no.	EAN no.	Colour
53941110	5704629002241	Nordic White
53941190	5704629002234	matt black

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.