




Technical data


Voltage	220-240 VAC 50/60 Hz
System effect	8W
Light source	6W LED, item no. 84310000 
Colour temperature	2700 / 3000 / 4000 Kelvin CCT switch
Light intensity	800 / 820 / 810 Lumen
Colour rendering	CRI>90
Expected lifespan	50.000 hours
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<5
Beam angle, horizontal / vertical	175° / 110°
Exterior dimensions	84010000: L: 600 x W: 80 x H: 80 mm 84020000: L: 555 x <W: 80 x H: 80 mm
Possibility of through wiring	Yes, 2 x 3G2.5 mm ²
Ambient temperature	-20° - +45°
Storage temperature	-20° - +65°
IP rating	IP44
IK rating	IK08
Insulation class	Class I
Material	Aluminium, plastic
Environment	Indoor
Warranty	5 years
Approvals	CE

Product information

- Mirror luminaire with a timeless design, which can be used in residential, commercial, hotels, etc.
- CCT switch 2700K / 3000K / 4000K
- High colour rendering index - CRI>90
- Dimmable
- Possibility of through wiring - 2 x 3G2.5 mm²
- Replaceable LED module / front
- Several installation options depending on the desired expression

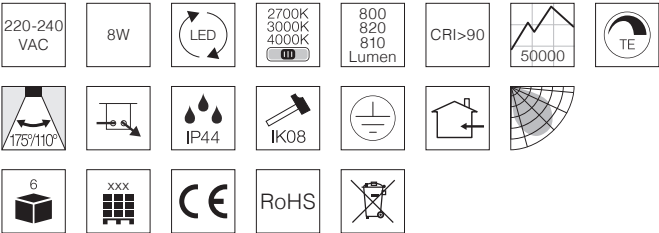

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

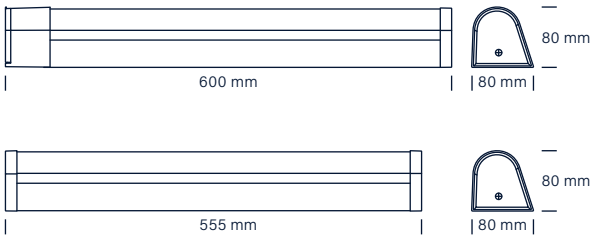

Bianka G2

Item no.	EAN no.	Colour	Type	Exterior dimension
84010000	5704629006478	mat hvid (RAL 9016)	with socket (max. 16A)	L: 600 x W: 80 x H: 80 mm
84020000	5704629006485	mat hvid (RAL 9016)	without socket	L: 555 x W: 80 x H: 80 mm