
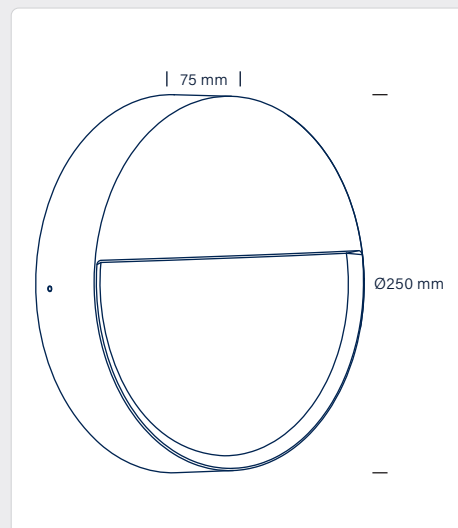


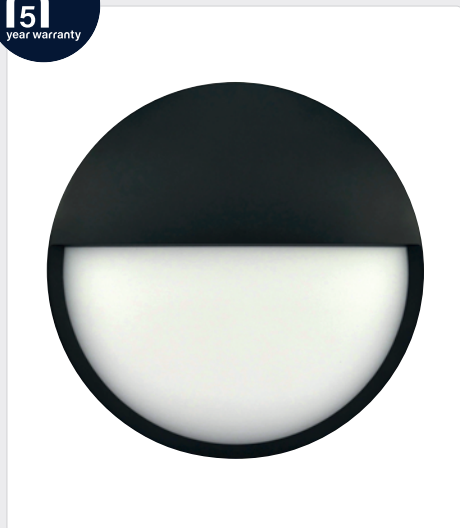


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	12W
Light source	9W LED, item no. 96120023 F
Colour temperature	3000 / 4000 Kelvin CCT switch
Light intensity	800 / 850 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	One single LED <3, on complete fixture <6
Beam angle	105°
Exterior dimensions	Ø250 mm, D: 75 mm
Possibility of through wiring	Yes, 2 x 5G1,5 mm ²
IP rating	IP65
IK rating	IK10
Insulation class	Class I
Material	Aluminium, polycarbonat
Environment	Indoors and outdoors
Warranty	5 years
Approvals	CE

Product information

- Modern luminaire made of aluminium and polycarbonat
- High lumen output
- Flicker free according to the latest Ecodesign / ErP directive
- CCT switch 3000K / 4000K
- High colour rendering index - CRI>90
- Dimmable - trailing edge

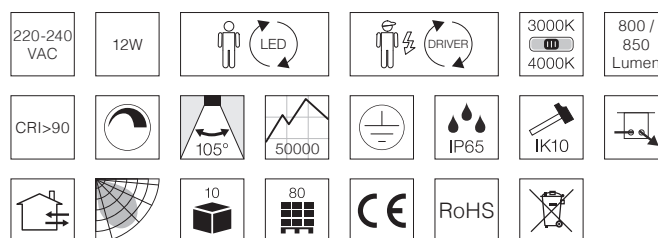

Item no.	EAN no.	Design, colour	Environment
96121091	5704629001305	○ matt black (RAL 9005)	Indoor and outdoor

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.