


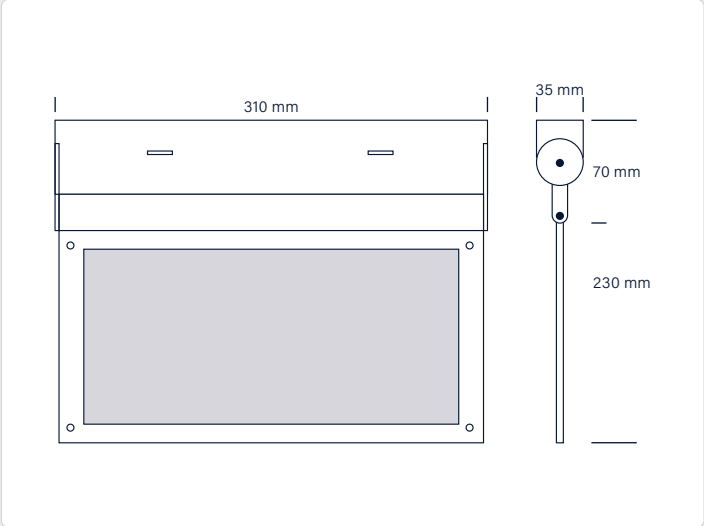


Technical data

|                       |                                |
|-----------------------|--------------------------------|
| Voltage               | 220-240 VAC 50/60 Hz           |
| System effect         | 3W                             |
| Light source          | LED                            |
| Colour temperature    | 6000 Kelvin                    |
| Light intensity       | 40-60 Lumen                    |
| Colour rendering      | CRI>80                         |
| Beam angle            | 120°                           |
| Exterior dimension    | L: 310 mm, W: 35 mm, H: 230 mm |
| Tilt angle            | 90°                            |
| Operating temperature | 0° - +55°                      |
| Reading distance      | Max. 24 m                      |
| Battery               | 3.2V 1800mAh LiFePO4           |
| Auto test             | Yes                            |
| Manual test button    | Yes                            |
| IP rating             | IP20                           |
| Insulation class      | Class II                       |
| Material              | Polycarbonate, metal           |
| Environment           | Indoor                         |
| Warranty              | 2 years                        |
| Approvals             | CE                             |

Product information

- Can be mounted directly on the wall and ceiling
- In case of power failure, the built-in battery pack provides approx. 3 hours of emergency operation
- Reading distance: Max. 24 m
- Incl. 3 x 2 pictograms
- Automatic self-test
- It is recommended to replace the battery every 4 years
- Conform to BS EN 605598-2-22

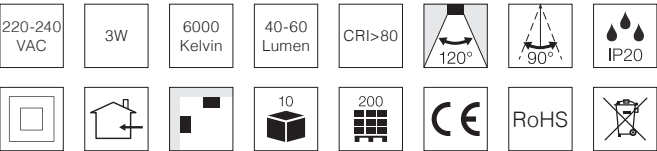

| Item no. | EAN no.       | Colour |
|----------|---------------|--------|
| 97121116 | 5704629006669 | white  |



NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.