





Technical data



Voltage	220-240 VAC 50/60 Hz
System effect	5.5W
Cos Phi / Power factor	0.8
Light source	LED
Colour rendering	CRI>90
Expected lifespan	25,000 hours
Dimmable	Yes
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<4
Beam angle	38°
Height	54 mm
Exterior dimensions	Ø50 mm
IP rating, front / back	IP44 / IP20
Material	Aluminium, plastic
Environment	Indoors and outdoors
Warranty	2 years
Approvals	CE

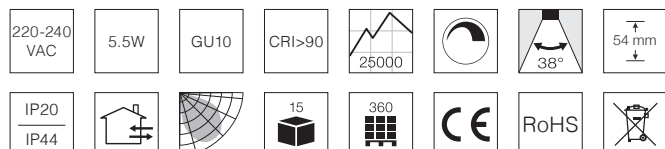

Product information

- Flicker free according to the latest Ecodesign / ErP directive
- High colour rendering index CRI>90
- High lumen output
- Low minimum setting on dimming range*
*The lowest setting is tested down to 5% on Nordtronic's Box Dimmer Dali item no. 98415031, Box Dimmer Zigbee item no. 98425031 and Box Dimmer Triac item no. 98445031

Item no.	EAN no.	Kelvin	Lumen	
98111152	5704629002012	2700K	350lm	
98111153	5704629002029	3000K	400lm	

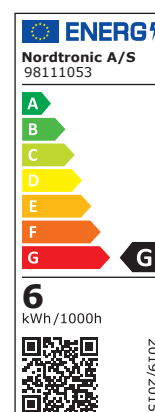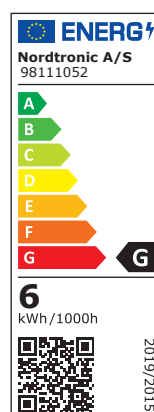

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.