





Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	4.8W
Cos Phi / Power factor	0,7
Light source	LED
Colour rendering	CRI>90
Expected lifespan	30,000 hours
Dimmable, how	Yes
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤6
Beam angle	36°
Height	54 mm
Exterior dimension	Ø50 mm
IP rating, front / back	IP44 / IP20
IK rating	IK03
Material	Plastic, metal
Environment	Indoor and outdoor
Warranty	2 years
Approvals	CE



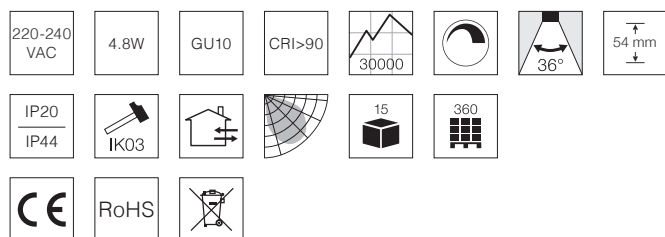


Product information

- Long lifespan - 30.000 hours
- Flicker free according to the latest Ecodesign / ErP directive
- High colour rendering index - CRI>90
- High lumen output
- The lowest setting on dimming range*

*The lowest setting is tested down to <5% on Nordtronic's
Box Dimmer Dali item no. 98415031,
Box Dimmer Zigbee item no. 98425031 and
Box Dimmer Triac item no. 98445031

Item no.	EAN no.	Kelvin Lumen	
98111482	5704629005372	2700K 380lm	G
98111483	5704629005389	3000K 400lm	G
98111484	5704629005396	4000K 430lm	F

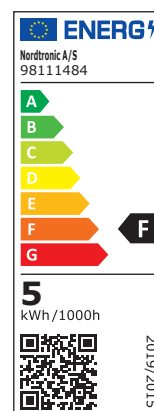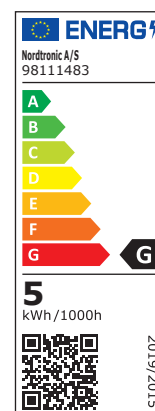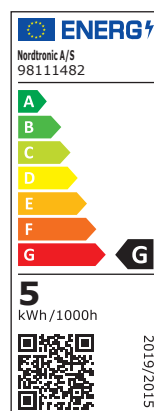

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.