



Technical data


Primary Voltage	220-240VAC
Secondary amperage	260 - 700mA
Min. load	5,2W
Max. load	25W
Efficiency	+86%
Fuse	Built-in thermal fuse with auto reset
Operating temperature	-20° / +50°
Cable with plug from secondary side	Ja, 11.9 cm
Connection cable on primary side	5-pole connector box for loop in and out with dali / Push and mains
Dimensions driver	L: 119 mm, W: 52 mm, H: 22.5 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
IP rating	IP20
Insulation class	Class II
Material	Plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

DIP Switch settings

Volt	mA	Watt
20 - 60V	260mA ± 5%	5.2 - 15W
20 - 60V	350mA ± 5%	7 - 21W
20 - 60V	400mA ± 5%	8 - 24W
20 - 55V	450mA ± 5%	9 - 25W
20 - 50V	500mA ± 5%	10 - 25W
20 - 45V	550mA ± 5%	11 - 25W
20 - 42V	600mA ± 5%	12 - 25W
20 - 36V	700mA ± 5%	14 - 25W

Product information

- Possibility for loop in and out with dali / Push and mains
- Built-in thermofuse with auto reset
- Quick and easy installation
- The driver can only be regulated via Dali or push dim
- Output current is selectable by DIP switch
- **The DIP switches must be manipulated only when the driver is off**
- **Do NOT plug in any LED lamps, when connected to power**

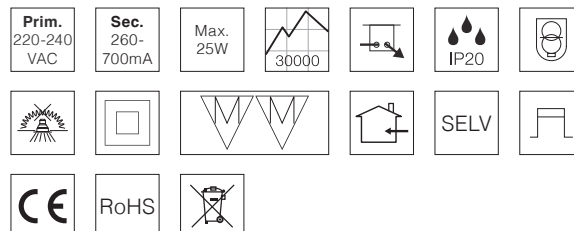

Item no.	EAN no.	Type
98525035	5704629000605	Dali / Push dim

Max. LED driver per circuit breaker

Circuit breaker	A ms	B10	B13	B16	B20
	5A@300ms	32	41	51	64
Circuit breaker	A ms	C10	C13	C16	C20
	5A@300ms	32	41	51	64

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.