



Technical data


Primary Voltage	220-240VAC
Secondary amperage	350 - 1050mA
Min. load	8.75W F
Max. load	45W
Efficiency	+87%
Fuse	Built-in thermal fuse with auto reset
Operating temperature	-20° / +50°
Cable with plug from secondary side	Ja, 11.9 cm
Connection cable on primary side	5-pole connector box for loop in and out with dali / Push and mains
Dimensions driver	L: 135 mm, W: 72 mm, H: 24 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
IP rating	IP20
Insulation class	Class II
Material	Plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

DIP Switch settings

Volt	mA	Watt
25 - 70V	350mA ± 5%	8.75 - 24.5W
25 - 70V	500mA ± 5%	12.5 - 35W
25 - 70V	600mA ± 5%	15 - 42W
25 - 64V	700mA ± 5%	17.5 - 45W
25 - 56V	800mA ± 5%	20 - 45W
25 - 50V	900mA ± 5%	22.5 - 45W
21 - 43V	1050mA ± 5%	22 - 45W

Product information

- Possibility for loop in and out with dali / Push and mains
- Built-in thermofuse with auto reset
- Quick and easy installation
- The driver can only be regulated via Dali or push dim
- Output current is selectable by DIP switch
- **The DIP switches must be manipulated only when the driver is off**
- **Do NOT plug in any LED lamps, when connected to power**

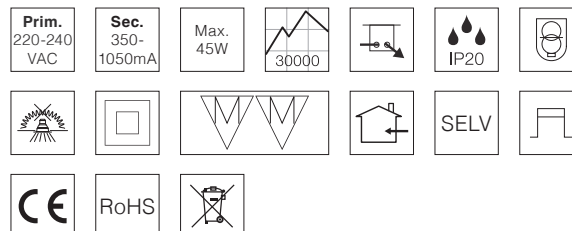

Item no.	EAN no.	Type
98525045	5704629000612	Dali / Push dim

Max. LED driver per circuit breaker

Circuit breaker	A ms	B10	B13	B16	B20
	5A@300ms	32	41	51	64
Circuit breaker	A ms	C10	C13	C16	C20
	5A@300ms	32	41	51	64

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.